


MGDUFF

Specification Code		Aluminium Alloy X
Composition		
Iron	Fe	0.10max.
Silicon	Si	0.05 - 0.10
Copper	Cu	0.004max.
Zinc	Zn	3.75 - 5.25
Indium	In	0.017 - 0.021
Titanium	Ti	0.025max.
Gallium	Ga	0.005 - 0.020
Others each		0.0250max
Aluminium	Al	Remainder
Potential Ag/AgCl		-1.05 V
Capacity- Amp.hr/kg		2500

Aluminium Alloy Ballast Tank Anodes

Straight Core Arrangement

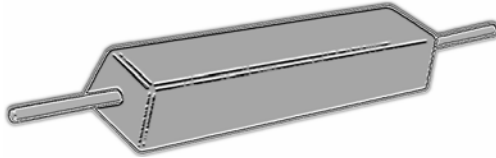

Double Cranked Core Arrangement



Anode Number	Overall Dimensions mm			Anode Body Dimensions mm			Core Bar dia	Net Weight (kg)	Gross Weight (kg)
	Length	Width	Height	Length	Width	Height			
MTA4	742	63	63	362	63	63	12	4.0	5.0
MTA8	1050	65	60	760	65	60	12	8.0	9.0
MTA12	1600	60	60	1220	60	60	12	11.6	13.2
MTA17	2000	65	60	1500	65	60	12	17.0	18.8
MTA20	1700	76	76	1220	76	76	12	18.8	20.3

A wide range of fixing arrangements and clamps are available from stock

