


MGDUFF

Specification Code		US Mil Spec 18001K
Composition		
Iron	Fe	0.005max.
Cadmium	Cd	0.025-0.07
Copper	Cu	0.005max.
Aluminium	Al	0.10-0.50
Lead	Pb	0.006max
Others total		0.10max
Zinc	Zn	Remainder
Potential Ag/AgCl		-1.05 V
Capacity- Amp.hr/kg		780

Zinc Alloy Ballast Tank Anodes

Straight Core Arrangement

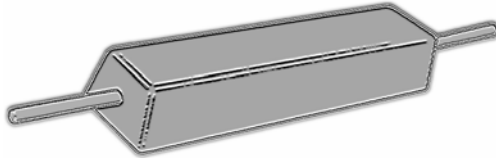

Double Cranked Core Arrangement



Anode Number	Overall Dimensions mm			Anode Body Dimensions mm			Core Bar dia	Net Weight (kg)	Gross Weight (kg)
	Length	Width	Height	Length	Width	Height			
MTZ10	742	63	63	362	63	63	12	10.0	11.0
MTZ20	1050	65	60	760	65	60	12	19.0	20.0
MTZ22	1600	60	62	1220	60	62	12	21.2	22.7
MTZ27	1600	55	60	1220	55	60	12	26.5	28.0
MTZ30	1600	60	62	1220	60	62	12	30.4	31.9
MTZ42	2000	65	60	1600	65	60	12	42.0	44.0

A wide range of fixing arrangements and clamps are available from stock

